

CENTRIFUGAL FANS

100mm (4") PLUG-IN

MAYFAIR 70 RANGE

KEY FEATURES


- ▶ Comply with current Building Regulation requirements
- ▶ Offers a very low SFP down to 0.39 W/(l/s)
- ▶ Quiet in operation
- ▶ Stylish fascia to fit interior design scheme
- ▶ Reduces carbon emissions




Technical data

Description	230V	SELV (230/12V)
Max Extract Volume (l/s)	High 19/Low 12	19
Max Extract Volume (m³/h)	High 70/Low 43	70
Max Pressure (Pa)	105	105
Supply Frequency (Hz)	50	50
Max Power (W)	High 35/Low 20	45
Max Sound Level dB(A) @3m	High 32/Low 12	32
Weight (kg)	1.7	3.5 inc transformer
IP Rating	X4	X4
Max Operating Temperature (°C)	40	40
Warranty	2 yrs	2 yrs

PERFORMANCE

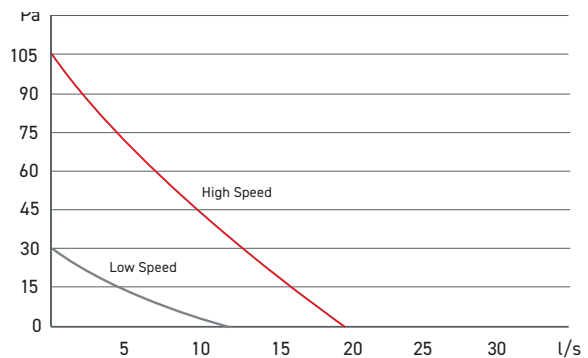

DIMENSIONS

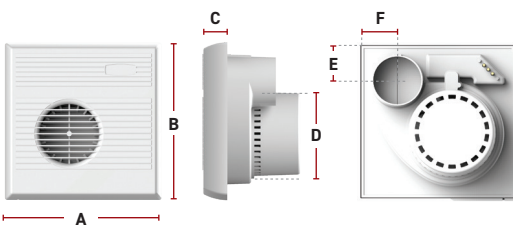

Measured in mm

A: 250 B: 250 C: 40 D: 90 E: 65 F: 65

Models

Product Code	SELV	Back Draught	dMEV Twin Speed	Pull Cord	Timer	Humidistat
MSS070B		•				
MPC070B		•		•		
MTD070B		•			•	
MTD070BLV	•	•				
MCC070B					•	•
MTS070B		•	•			
MTT070B		•	•		•	

Accessories

SPR405	Replacement Front Cover
MAY904A	Surface Installation Back Box, Plastic
MAY905B	Building in Wall Back Box
MAY906A	Surface Installation Back Box, Metal
MAYFD	Fire Damper Back Plate

**YOUR
VENTILATION
SPECIALIST**

03443 715 523

www.domusventilation.co.uk

domusventilation_

