

PVC BARRIER TAPE

TECHNICAL DATA SHEET

CODE


123

DESCRIPTION

A general PVC tape (non flame retardant)

APPLICATIONS

- ▶ Economy floor marking
- ▶ Jointing of polythene sheeting
- ▶ Barrier tape to prevent electrolytic reaction
- ▶ Sealing insulation panels
- ▶ Patching, sealing (boxes, drums, kegs) repair

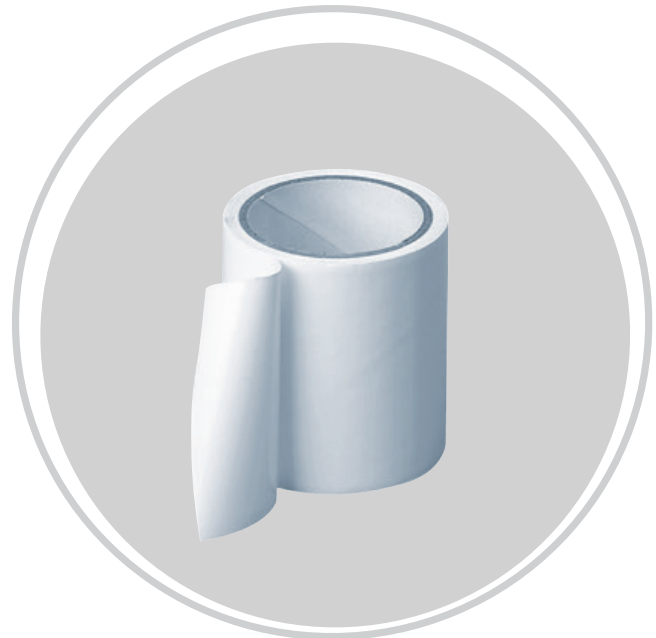

Technical details	Typical values
Total thickness:	0.14 mm
Adhesive power:	200N/m
Backing thickness:	-
Tensile strength:	2KN/m
Elongation:	200%
Temperature:	-20°C to 80°C
Dielectric strength:	6KV
Colours:	Black, White, Grey
Shelf life:	12 months

Note: Unless otherwise indicated, the figures above are average values and should not be treated at face value for specification purposes. The company reserves the right to improve products and any change in specification will result in a re-issue of the information sheet. Customers should satisfy themselves that the tape is suitable for their requirements whether after such modification or otherwise. Please check that you have the latest issue of the information sheet. All slitting and length tolerances are to British Standards, but other tolerances are available by request.

**YOUR
VENTILATION
SPECIALIST**

03443 715 523

www.domusventilation.co.uk

domusventilation_



©Domus Ventilation 2022. Issue date 2022-08

The information contained in this publication is correct at the time of print and is subject to change. Please visit our website for the latest information: www.domusventilation.co.uk

E & OE We reserve the right to alter product specification without prior notice
Domus Ventilation | Block C, Van Court, Caerphilly CF83 3ED, United Kingdom