


## AXIAL FANS

# 100MM (4") AXIAL

## SDF RANGE

### KEY FEATURES


- ▶ Provides effective ventilation
- ▶ Extract rates comply with current
- ▶ Building Regulation requirements
- ▶ Quiet in operation

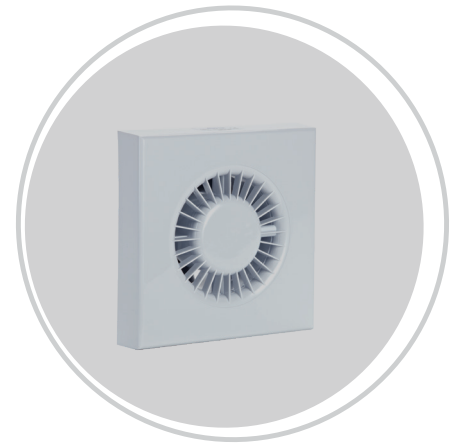

### Technical data

Description	230V	SELV (230/12V)
Max Extract Volume (l/s)	22	22
Max Extract Volume (m³/h)	80	80
Max Pressure (Pa)	16	16
Supply Frequency (Hz)	50	50
Max Power (W)	12	20
Max Sound Level dB(A) @3m	32	37
Weight (kg)	0.6	1.5 inc transformer
IP Rating	X4	X4
Max Operating Temperature (°C)	40	40
Wall-Fit Hole Diameter (mm)	110	110
Window-Fit Hole Diameter (mm)	127-40	127-40
Suitable for Glass Thickness [mm]	4-25	4-25
Warranty	2 yrs	2 yrs


## PERFORMANCE

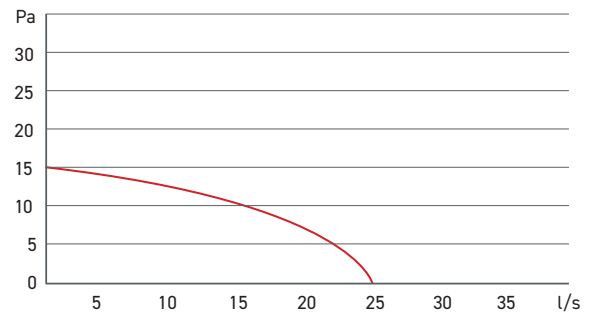

### Models

Product Code	SELV	Back Draught	Retail Pack	Pull Cord	Timer	Humidistat
SDF100B						
SDF100BLV	•					
SDF100PB						
SDF100TB					•	
SDF100TBLV	•				•	
SDF100TBLVS	•	•			•	
SDF100TBS	•	•			•	
SDF100HTB					•	•
SDF100HTBLV					•	•
SDF100HBPCLV						
SDF100PIR						

## DIMENSIONS

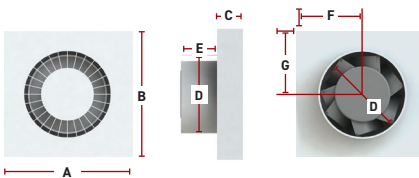

Measured in mm

A: 166 B: 166 C: 35 D: 99 E: 45 F: 83 G: 83

## YOUR VENTILATION SPECIALIST

03443 715 523

[www.domusventilation.co.uk](http://www.domusventilation.co.uk)

domusventilation\_



### Accessories

1K	Wall Fitting Kit
ANC710A	Chrome effect cover
SDF901WFK	Window fitting kit for 100mm SDF and SVC fans

©Domus Ventilation 2022. Issue date 2022-08

The information contained in this publication is correct at the time of print and is subject to change. Please visit our website for the latest information: [www.domusventilation.co.uk](http://www.domusventilation.co.uk)

Domus Ventilation | Block C, Van Court, Caerphilly CF83 3ED, United Kingdom